



ALP AFRICA (PTY.) LTD.

# AEROSTICK PRO

**HIGH STRENGTH ADHESIVE FOR  
NITRILE, EPDM & XLPE INSULATION**

## ADVANTAGES

- ◆ High strength adhesion
- ◆ Low VOC
- ◆ Easy to apply
- ◆ Enhanced coverage



## PRODUCT DESCRIPTION

Aerostick Pro is a modified neoprene rubber based contact adhesive specially formulated for bonding Aeroflex range of insulation firmly together with cold weld joints. The high water vapour resistance and good weathering properties of Aerostick Pro can prevent water or moisture from penetrating through the insulation joints. Aerostick Pro is able to form a strong, firm and permanent bonding between the applied materials providing long-lasting performance.

## METHOD OF USE

1. Prior to application, mix adhesive properly to ensure blending of settled solids.
2. Apply a slight uniform layer of adhesive to the surfaces to be joined using a brush with short firm Bristles. Work should be done when plants are not in working state and avoid solid daylight.
3. To check if the joint is firm, try fingernail test. If fingernail doesn't stick to the surface, it can be comprehended that the joints are filled.
4. Wet seal should be used in areas such as butt joint, where it cannot be expected for the adhesive to dry before joining. A wet seal might be made by separating the surfaces, applying a thin layer of adhesive to close the joint.
5. Permit at least 36 hours of restoring prior to charging the line or applying any coating.
6. Minimum application temperature 20 ° C to 30 ° C
7. Do not blend adhesive with any other solvent such as water or thinner.
8. Adhesive should be applied only in shadow areas..

### Applications

1. Surface on which Aerostick Pro is applied should be dry, clean and free from dust, grit, oil, grease or any other loose materials.
2. Stir Aerostick Pro well before applying a thin and even coat of Aerostick Pro onto both joining surfaces by using a short hair brush, spreader or metal spatula.
3. Allow solvent content of Aerostick Pro to evaporate until the adhesive becomes dry to touch, but tacky, before joining the materials together normally open time is 5 to 30 minutes.
4. Bonding is possible within 2 mins. after application, if used on absorbent or permeable materials such as, cork board and chipboard etc.  
If applied on non-absorbent or non-permeable materials like Aeroflex insulation rubber or metal, a minimum of 5-20 mins. should be allowed to elapse before the surfaces can be bonded.
5. Press and hold the surfaces to be bonded together under firm pressure.

## TECHNICAL DETAILS

### PROPERTIES


APPEARANCE	Pale Yellow Viscous Liquid
TOTAL SOLIDS	20.5 ± 3%
VISCOSITY @ 30 ° C	700 - 1200 Cps
SPECIFIC GRAVITY	0.88 ± 0.05 Kg/lit
COVERAGE (Apply Adhesive both Surface)	6 - 8 m <sup>2</sup> /Ltr
Drying Time (Complete Bond)	1 to 3 min

## STORAGE & SHELF LIFE

Aerostick Pro can be preserved for at least 12 months in original unopened containers when stored indoors, away from direct sunlight. Recommended storage temperature range from +5 ° C to +35 ° C. Avoid keeping Aerostick Pro under conditions that are out of the recommended storage temperature range.

## HEALTH & SAFETY

1. Suggested to work in well ventilated areas to avoid inhalation of solvent vapor.
2. The solvents contained in Aerostick Pro are inflammable and subjected to legislation regulating their storage and use.
3. Keep away from fire, and materials which may cause fire such as paper cloth, plastic etc.
4. Aerostick Pro contains flammable liquid but dried adhesive layer is self extinguishing.

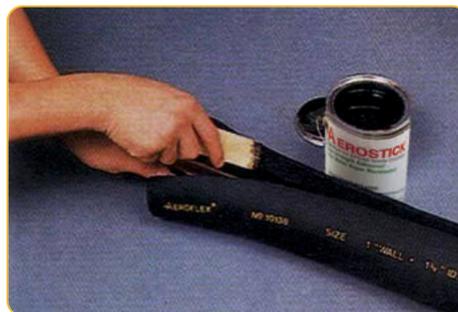

AAIPL-AS-PC-040622

ALP AFRICA (PTY.) LTD.

Address : 11 Marthinus Ras St, Rosslyn, Pretoria, South Africa

☎ +27-12 541 7691 ✉ info@alpafrika.co.za 🌐 www.alpafrika.co.za

Disclaimer: Although these values represent actual results achieved in tests, they should only be used as a guide. ALP Aeroflex cannot guarantee the performance of the product as all situations are different & should be treated separately. All statements & Technical informations are based on results obtained under typical conditions. It is the responsibility of the recipient to verify with us that the informations are appropriate for specific use intended by the recipient.